



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 244 322 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
25.09.2002 Bulletin 2002/39

(51) Int Cl.⁷: **H04Q 7/38**

(21) Application number: **02006107.3**

(22) Date of filing: **18.03.2002**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Nakagomi, Hisashi
Yokohama-shi, Kanagawa 221-0862 (JP)
• Takami, Tadao
Yokosuka-shi, Kanagawa 238-0026 (JP)

(30) Priority: **19.03.2001 JP 2001078683**

(74) Representative: Bockhorni, Josef et al
Patentanwälte Herrmann-Trentepohl - Grosse -
Bockhorni & Partner GbR,
Forstenrieder Allee 59
81476 München (DE)


(71) Applicant: **NTT DoCoMo, Inc.**
Tokyo 100-6150 (JP)

(54) **Mobile communication terminal device and server device**

(57) The mobile communication terminal device (1) has a security communication function, and includes a detection unit (4) for detecting the security level of the

destination of connection, and an announcing unit (5) for announcing the detected security level. The user is able to confirm whether security is ensured at the connectee.

Fig.1

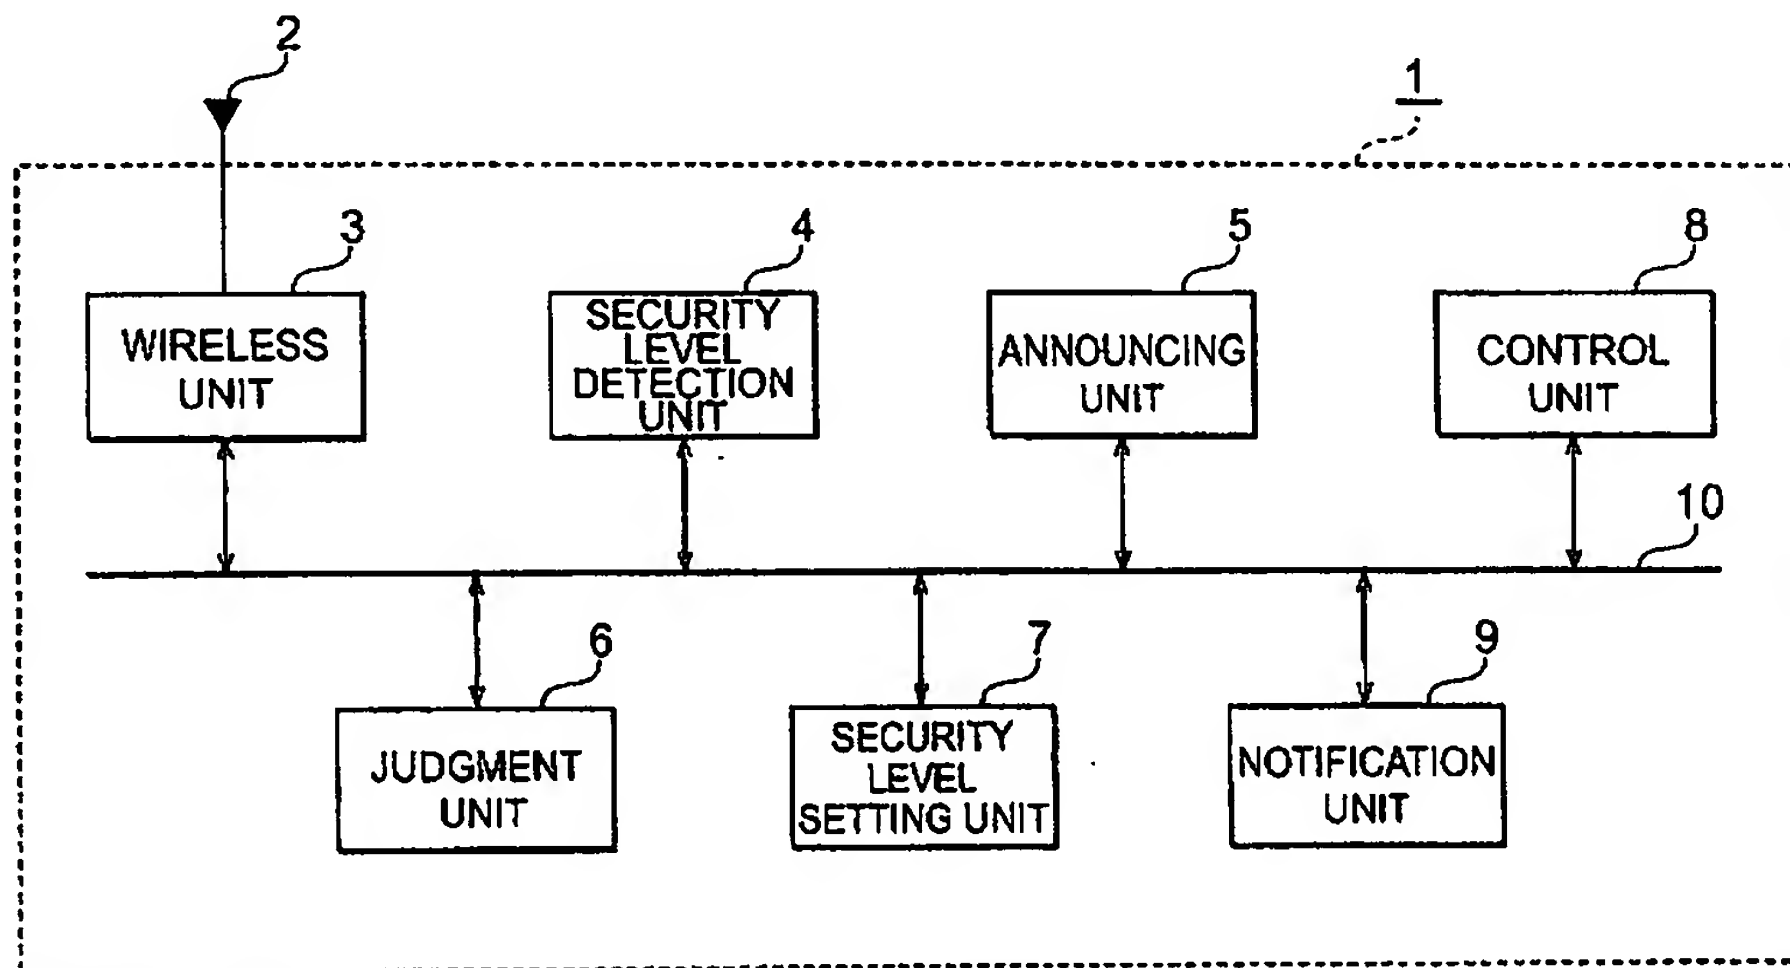

EP 1 244 322 A1

BEST AVAILABLE COPY

Description**BACKGROUND OF THE INVENTION**5 **Field of the Invention**

[0001] The present invention relates to a mobile communication terminal device and server device having a security communication function.

10 **Description of the Related Art**

[0002] Conventionally, in a wireless communication system, a communication procedure referred to as authentication has been employed between the portable communication terminal device and communication system for confirming the validity of the person or the terminal at the other end of the line. Moreover, in order to encode signals transmitted and received between the portable communication terminal device and communication system, a communication procedure referred to as ciphering is also concurrently employed. Pursuant to these communication procedures, the mobile communication terminal device and communication system are able to mutually guarantee the validity of the opponent, and, simultaneously, the confidentiality of the transmitted and received signal is retained. This prevents an individual from trying to pass oneself as the caller or receiver in order to alter or scope data. Security of the communication and communication system is ensured thereby.

[0003] In an analog wireless communication system, it was necessary to change the analog wireless modulation method for ensuring the security described above. Thus, a circuit for changing the modulation method had to be added to or installed in the modulation and demodulation circuit of the communication system and mobile communication terminal device. As a result, the communication system cost would increase, and power consumption would increase pursuant to the additional circuit of the mobile communication terminal device, thereby causing significant decrease in portability. Further, there is an additional problem in that the communication signal quality cannot be maintained easily due to the increase in the operational process of analog signals of the added circuit.

[0004] Thereafter, in digital wireless communication, authentication and ciphering with digital signal processing have been proposed, and it has become easy to ensure security. Nevertheless, when connecting a mobile communication terminal device and a communication system operating on the digital system, there is a premise of the ensurement of such security based on the aforementioned authentication and ciphering. In a wireless mobile communication method, regarding a delay in the connection of a call, it is not desirable that the design requires a long time to connect the call in comparison to a wired telephone connection from the perspective of service. Moreover, in data communication, it is also preferable that the connection delay be kept to a minimum even for interactive uses such as upon using the web browsing. Based on such demands, in the connection of a mobile communication terminal device and a communication system, the design is such that the time required from the start of connection to authentication and ciphering is kept to a minimum.

[0005] Fig. 10 is a diagram illustrating an example of the communication procedure of the authentication and ciphering conventionally employed upon connecting a mobile communication system and mobile communication terminal device. As shown in Fig. 10, after the radio bearer connection procedure is started from the stand-by mode, an authentication request is made from the communication system to the mobile communication terminal device. The mobile communication terminal device makes an authentication response to the communication system upon receiving the authentication request. Next, the communication system makes a ciphering request to the mobile communication terminal device, and the mobile communication terminal device makes a ciphering response thereto. Then, the line connection procedure is commenced, and the routine proceeds to the connected state. As described above, the design is such that the authentication and ciphering are completed with the transmission and reception of a few signals. Therefore, the user is able to immediately make communication without having to recognize the contents or situation of the communication procedure of authentication and ciphering upon receiving or making a call.

50 **SUMMARY OF THE INVENTION**

[0006] In the future, it is anticipated that the transmission speed will become faster, and, in addition to conventional voice communication and data communication, electronic commerce and distribution services of pay contents information will be realized with a mobile communication terminal device. With this type of diversified communication, the following types of security are required:

Provision of conventional security between the mobile communication terminal device and communication system;
and

Provision of end-to-end security from the mobile communication terminal device to the person or the terminal on the other end of the line connected via the Internet, with respect to transaction information or the like with financial institutions and credit card companies.

- 5 **[0007]** In order to simultaneously satisfy the above, the communication system and mobile communication terminal device may be equipped with hardware and software based on the most powerful security technology to date. Nonetheless, with security having sophisticated functions and strength, the operational processing in the authentication and ciphering will increase, which will result in the increase of connection delay. Further, the increase in the encoding processing load of transmission data will put pressure on the processing performance of the communication system, thereby causing the increase in the power consumption of the mobile communication terminal.
- 10 **[0008]** Thus, it is demanded that the security be suitably selected as a trade off against the transmission speed of communication, communication of the opponent (depending on the security performance of the opponent; for example, the server of the opponent connected a telephone or communication system), function and strength (security level) of security suitable for the type of communication, and processing time and load of the security procedure.
- 15 **[0009]** Moreover, when the provision of security is not made under a specific condition (applicable condition of the area, country or load reduction of communication system; simplification of mobile communication terminal in order to seek the reduction in power consumption, etc.), it is anticipated that the security will not be provided in some cases. Accordingly, the security level in a mobile communication terminal device and mobile wireless communication system will diversify as described above.
- 20 **[0010]** The present invention was devised in view of the foregoing problems, and an object thereof is to provide a mobile communication terminal device and server device enabling the selection of connection/disconnection in accordance with the security level of the connectee (the other end of the line).
- [0011]** In order to achieve the foregoing object, the present invention is a mobile communication terminal device having a security communication function, comprising: a detection unit for detecting the security level of the connectee; and a announcing unit for announcing the detected security level.
- 25 **[0012]** Since the security level of the connectee is detected and such detected security level is announced upon conducting communication, the user is able to confirm whether security is ensured at the connectee. Here, communication includes, in addition to standard communication such as voice communication and data communication, control communication for notifying positional information of a mobile communication terminal device.
- 30 **[0013]** It is preferable that the mobile communication terminal device of the present invention further comprises a judgment unit for judging whether the detected security level satisfies a prescribed condition, and wherein the announcing unit announces the results of the judgment.
- [0014]** As described above, since judgment is made on whether the detected security level satisfies a prescribed condition, the user is able to select whether to continue or discontinue communication in accordance with the judgment result.
- 35 **[0015]** Further, in this case, it is preferable that the mobile communication terminal device further comprises a security level setting unit for setting at least one of a security level permitting communication or a security level not permitting communication.
- [0016]** Pursuant to this structure, the user may freely set the necessary security level.
- 40 **[0017]** Moreover, in this case, it is preferable to further comprise a control unit for discontinuing communication when the detected security level has not reached the security level permitting communication or falls below the security level not permitting communication.
- [0018]** As described above, when the detected security level has not reached a security level permitting communication, or falls below a security level not permitting communication, the communication is discontinued. Thereby, if the user is not satisfied with the security condition the user set, communication can be automatically discontinued, and troubles relating to security may be forestalled.
- 45 **[0019]** Further, when comprising the foregoing security level setting unit, it is preferable that the announcing unit urges the selection of continuance or discontinuance of communication when the detected security level has not reached the security level permitting communication or falls below the security level not permitting communication.
- 50 **[0020]** As described above, when the detected security level has not reached the security level permitting communication or falls below the security level not permitting communication, the selection of continuance or discontinuance of communication is urged. Thereby, the user is able to select whether to continue or discontinue communication when the detected security level does not satisfy the set condition.
- [0021]** Moreover, it is preferable that the mobile communication terminal device of the present invention further comprises a notification unit for notifying the caller of the discontinuance of communication when communication is discontinued based on the security level detected at the time of call reception.
- 55 **[0022]** As described above, notification is made to the caller of the discontinuance of communication when communication is discontinued based on the security level detected at the time of call reception. It is thereby possible to notify

the caller of the discontinuance of communication.

[0023] The server device according to the present invention is a server device for communicating with a mobile communication terminal device via a communication network, comprising: a server side detection unit for detecting the security level of the connectee; and a security level setting unit for setting at least one of a security level permitting communication or a security level not permitting communication.

[0024] Pursuant to this structure, the user may freely set the necessary security level.

[0025] Further, it is preferable that the server device of the present invention further comprises a server side control unit for discontinuing communication when the detected security level has not reached the security level permitting communication or falls below the security level not permitting communication.

[0026] As described above, when the detected security level has not reached a security level permitting communication, or falls below a security level not permitting communication, the communication is discontinued. Thereby, if the user is not satisfied with the security condition the user set, communication can be automatically discontinued, and troubles relating to security may be forestalled.

[0027] Moreover, it is preferable that the server device according of the present invention further comprises an inquiry unit for making an inquiry to the mobile communication terminal device to select either the continuance or discontinuance of communication when the detected security level has not reached the security level permitting communication or falls below the security level not permitting communication; and a server side control unit for continuing or discontinuing communication in accordance with the response to the inquiry.

[0028] As described above, when the detected security level has not reached the security level permitting communication or falls below the security level not permitting communication, an inquiry is made to the mobile communication terminal device to select either the continuance or discontinuance of communication, and communication is continued or discontinued in accordance with the response to such inquiry. Thereby, the user is able to select the continuance or discontinuance of communication when the detected security level does not satisfy the set condition.

[0029] The present invention will become more fully understood from the detailed description given hereinbelow and the accompanying drawings which are given by way of illustration only, and thus are not to be considered as limiting the present invention.

[0030] Further scope of applicability of the present invention will become apparent from the detailed description given hereinafter. However, it should be understood that the detailed description and specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only, since various changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

[0031] The present invention may be more readily described with reference to the accompanying drawings, in which:

Fig. 1 is a block diagram illustrating the schematic structure of the mobile communication terminal device according to an embodiment of the present invention;

Fig. 2 is a diagram illustrating the schematic structure of the server device according to an embodiment of the present invention;

Fig. 3 is a diagram illustrating the outline of the communication system according to an embodiment of the present invention;

Fig. 4 is a flowchart illustrating the operation of the mobile communication terminal device;

Fig. 5 is a flowchart illustrating another operation of the mobile communication terminal device;

Fig. 6 is a flowchart illustrating another operation of the mobile communication terminal device;

Fig. 7 is a flowchart illustrating another operation of the mobile communication terminal device;

Fig. 8 is a flowchart illustrating another operation of the mobile communication terminal device;

Fig. 9 is a diagram illustrating a modified example of the communication system according to the present invention; and

Fig. 10 is a diagram illustrating the communication order of the authentication and ciphering currently employed in the connection between a mobile communication system and mobile communication terminal device.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0032] The optimum embodiments of the present invention are now explained with reference to the accompanying drawings.

[0033] Fig. 1 is a block diagram illustrating the schematic structure of the mobile communication terminal device of the present embodiment. A mobile communication terminal device 1 has a security communication function, and conducts wireless communication with a wireless unit 3 comprising an antenna 2. A security level detection unit 4 detects

the security level of the connectee, and an announcing unit 5 announces the detected security level to the user. This announcing, for example, may be made by displaying a graph of the security level on a liquid crystal display not shown or by outputting sound data. Further, the security level may be an indicator of a type of the security.

5 [0034] A judgment unit 6 judges whether the security level detected with the security level detection unit 4 satisfies a prescribed condition. As a prescribed condition, for instance, there is a security level set by the user via a security level setting unit 7 described later, or a predetermined security level. The announcing unit 5 announces the result of such the result detected by a security level detection unit 4 to the user. The user is thereby able to recognize which security is used upon communication.

10 [0035] The security level setting unit 7 sets at least one of a security level permitting communication when the detected security level is not less than the value thereof, or a security level not permitting communication when the detected security level is less than the value thereof. The user is thereby able to freely set the necessary security level at his/her judgment. A control unit 8 discontinues communication when the detected security level has not reached a security level permitting communication, or falls below a security level not permitting communication. It is thereby possible to avoid communication which is likely to cause trouble. A notification unit 9 notifies the discontinuance of communication to the caller when communication is discontinued based on the security level detected at the time of call reception. Each of the aforementioned structural elements is mutually connected to a control bus 10.

15 [0036] Moreover, the announcing unit 5 may also urge the user to select either the continuance or discontinuance of communication when the detected security level has not reached a security level permitting communication, or falls below a security level not permitting communication.

20 [0037] Fig. 2 is a diagram illustrating the schematic structure of the server device of the present embodiment. A server device 20 is connected to a communication network via a network interface 21, and conducts communication with a mobile communication terminal device via a switching center and base station not shown. A server side detection unit 22 detects the security level of communication with the mobile communication terminal device, and a server side security level setting unit 23 sets at least one of a security level permitting communication or a security level not permitting communication based on the user's instructions. A server side control unit 24 discontinues communication when the security level detected by the server side detection unit 22 has not reached a security level permitting communication, or falls below a security level not permitting communication. It is thereby possible to avoid communication likely to cause trouble.

25 [0038] An inquiry unit 25 makes an inquiry to the mobile communication terminal device to select either the continuance or discontinuance of communication when the security level detected with the server side detection unit 22 has not reached the security level permitting communication or falls below the security level not permitting communication, and the server side control unit 24 continues or discontinues communication in accordance with the response to the inquiry.

30 [0039] Fig. 3 is a diagram illustrating the outline of the communication system of the present embodiment. A portable telephone device 30 as the mobile communication terminal device adopts the basic structure depicted in Fig. 1, and further comprises an internal memory storing security information, and an external communication interface. The portable telephone device 30 conducts wireless transmission and reception of signals with the base station 31. Signals transmitted by the portable telephone device 30 are received by the base station 31, and forwarded to the user information server 34 as the server device connected to a core network 33 via a switching center 32. The user information server 34 adopts the basic structure as depicted in Fig. 2, and further comprises an internal memory storing security information, and user ID. Signals transmitted by the user information server 34 are forwarded to the portable telephone device 30 in an opposite flow.

35 [0040] Next, the operation of a communication system of the present embodiment structured as described above is explained. Fig. 4 is a flowchart illustrating the operation of the mobile communication terminal device. When the portable communication terminal device receives a call, or when the portable communication terminal device makes a call (step S1), the portable communication terminal device and communication system commence a communication activation procedure (step S2). Next, the security level of such communication or communication system is detected, and information thereof is exchanged and notified to the user (step S3). Communication is thereafter established (step S4). Here, as a method of notifying the user, a liquid crystal display, or illumination, flashing or color-change of light-emitting elements may be made, for example, on the screen of the mobile communication terminal device as the external communication interface depicted in Fig. 3. Moreover, notification may also be made through a sound talkie, vibration, and so on. Here, adopted may also be a mode of avoiding the direct notification to the user by suspending the notification to the portable communication terminal device.

40 [0041] As described above, since the security level of the destination of connection is detected and such detected security level is announced upon conducting communication, the user is able to confirm whether security is ensured at the destination of connection.

45 [0042] Fig. 5 is a flowchart illustrating another operation of the portable communication terminal device. When the portable communication terminal device receives a call, or when the portable communication terminal device makes

a call (step T1), the portable communication terminal device and communication system commence a communication activation procedure (step T2). Next, the security level of such communication or communication system is detected, and information thereof is exchanged and notified to the user (step T3). The user recognizes such notification via the external notification interface or the like and selects whether to continue or disconnect communication (step T4). Communication is ended when disconnection is selected (step T5), and communication is established when continuance is selected (step T6).

[0043] As described above, since judgment is made on whether the detected security level satisfies a prescribed condition, the user is able to select whether to continue or discontinue communication in accordance with the judgment result.

[0044] Fig. 6 is a flowchart illustrating another operation of the portable communication terminal device. The user sets a security condition beforehand in an internal memory storing security level information within the portable communication terminal device, or in an internal memory storing securing information in a user information server within the communication system (step R1). Here, it is possible to select at least one of a security level permitting communication or a security level not permitting communication. When the portable communication terminal device receives a call, or when the portable communication terminal device makes a call (step R2), the portable communication terminal device and communication system commence a communication activation procedure. Next, the detected security level is compared with the security level condition previously set by the user (step R3), and communication is disconnected when such condition is not satisfied (step R4). Contrarily, communication is established when such condition is satisfied (step R5).

[0045] As described above, when the detected security level has not reached a security level permitting communication, or falls below a security level not permitting communication, the communication is discontinued. Thereby, if the user is not satisfied with the security condition the user set, communication can be automatically discontinued, and troubles relating to security may be forestalled.

[0046] Fig. 7 is a flowchart illustrating another operation of the mobile communication terminal device. The user sets a security condition beforehand in an internal memory storing security level information within the portable communication terminal device, or in an internal memory storing securing information in a user information server within the communication system (step P1). Here, it is possible to select at least one of a security level permitting communication or a security level not permitting communication. When the portable communication terminal device receives a call, or when the portable communication terminal device makes a call (step P2), the portable communication terminal device and communication system commence a communication activation procedure (step P3). Next, the detected security level is compared with the security level condition previously set by the user (step P4), and, when such condition is not satisfied, the user is urged to select the continuance or disconnection of communication, and judgment is made on which selection has been made (step P5). Communication is disconnected when disconnection is selected (step P6), and communication is established when continuance is selected (step P7). Meanwhile, communication is established when the security condition is satisfied at step P4 (step P8).

[0047] As described above, when the detected security level has not reached the security level permitting communication or falls below the security level not permitting communication, the selection continuance or discontinuance of communication is urged. Thereby, the user is able to select whether to continue or discontinue communication when the detected security level does not satisfy the set condition.

[0048] Fig. 8 is a flowchart illustrating another operation of the mobile communication terminal device. When the mobile communication terminal device receives a call from the person or the terminal on the other end of the line (step Y1), the portable communication terminal and communication system commence a communication activation procedure. Next, a connection judgment is made pursuant to the security of such communication or communication system (step Y2), and judged is whether connection is possible (step Y3). When not connectable, the opponent is notified of the discontinuance of connection due to the security level (step Y4), and communication is disconnected (step Y5). Meanwhile, when connectable at step Y3, communication is established (step Y6).

As described above, notification is made to the caller of the discontinuance of communication when communication is discontinued based on the security level detected at the time of call reception. It is thereby possible to notify the caller of the discontinuance of communication.

[0049] Fig. 9 is a diagram illustrating a modified example of the communication system of the present embodiment. In this example, in addition to the communication system depicted in Fig. 3, another network 35 is connected to the core network 33, and a base station 37 is connected to the core network 33 via the switching center 36. The base station 37 conducts wireless communication with the opponent side communication terminal device 38. In this example, the user is able to confirm the security of the path from the user's portable telephone device 30 to the opponent side communication terminal device 38 connected thereto. Moreover, as a method for the user to confirm the security level or to notify the opponent, a sound talkie or a screen display on the mobile communication terminal device, among other methods, may be employed in the case of a voice communication. Further, in the case of data communication, an AT command, screen display on the mobile communication terminal device, alarm indication on the application conducting

communication, among other methods, may be employed. In addition, in a communication without human intervention; for instance, in a communication between the mobile communication terminal device established in a vending machine or the like and a host computer, since a person is not able to make direct confirmation, the software conducting such communication may make the confirmation, or an alarm may be recorded.

[0050] In the foregoing explanation, as information to be used by the user for confirming the security level, the method of providing security; for example, only ciphering, only authentication, difference in code strength and so on may be considered. Table 1 below depicts an example of the notification method. In Table 1, "UE" means User Equipment (mobile communication terminal device). "NW" means Network, and the meaning of "communication system" and "communication" is included therein.

[Table 1]

UE operation and display in network without security	When making a call	When receiving a call	NW talkie to caller
Selection by user	After inputting the telephone number, confirmed is whether to call such number with a dialog while the receiver is off-hook	Dialog is displayed at the time of call reception, and confirmed is whether to accept the call	Notification of discontinuance of communication by user
No selection by user	Invalid call "NW without security"	Invalid reception "NW without security"	Disconnect User denied

[0051] As described above, according to the present embodiment, since the user is able to confirm the security level of the communication or communication system attempting connection, such user may select whether to make the connection, and a standard security is ensured thereby.

[0052] As explained above, the mobile communication terminal device according to the present invention is a mobile communication terminal device having a security communication function, and employs a structure of comprising a detection unit for detecting the security level of the destination of connection, and a announcing unit for announcing the detected security level.

[0053] As described above, since the security level of the destination of connection is detected and such detected security level is announced upon conducting communication, the user is able to confirm whether security is ensured at the destination of connection.

[0054] From the invention thus described, it will be obvious that the embodiments of the invention may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended for inclusion within the scope of the following claims.

Claims

1. A mobile communication terminal device having a security communication function, comprising:
a detection unit for detecting the security level of the destination of connection; and
an announcing unit for announcing said detected security level.
2. A mobile communication terminal device according to claim 1, further comprising a judgment unit for judging whether said detected security level satisfies a prescribed condition, and wherein said announcing unit announces the results of said judgment.
3. A mobile communication terminal device according to claim 2, further comprising a security level setting unit for setting at least one of a security level permitting communication and a security level not permitting communication.
4. A mobile communication terminal device according to claim 3, further comprising a control unit for discontinuing communication when said detected security level has not reached said security level permitting communication or falls below said security level not permitting communication.

EP 1 244 322 A1

5. A mobile communication terminal device according to claim 3, wherein said announcing unit urges the selection of the continuance or discontinuance of communication when said detected security level has not reached said security level permitting communication or falls below said security level not permitting communication.
- 5 6. A mobile communication terminal device according to claim 1, further comprising a notification unit for notifying the caller of the discontinuance of communication when communication is discontinued based on the security level detected at the time of call reception.
- 10 7. A server device for communicating with a mobile communication terminal device via a communication network, comprising:
- a server side detection unit for detecting the security level; and
a server side security level setting unit for setting at least one of a security level permitting communication and a security level not permitting communication.
- 15 8. A server device according to claim 7, further comprising a server side control unit for discontinuing communication when said detected security level has not reached said security level permitting communication or falls below said security level not permitting communication.
- 20 9. A server device according to claim 7, further comprising:
- an inquiry unit for making an inquiry to said mobile communication terminal device to select either the continuance or discontinuance of communication when said detected security level has not reached said security level permitting communication or falls below said security level not permitting communication; and
25 a server side control unit for continuing or discontinuing communication in accordance with the response to said inquiry.

30

35

40

45

50

55

Fig.1

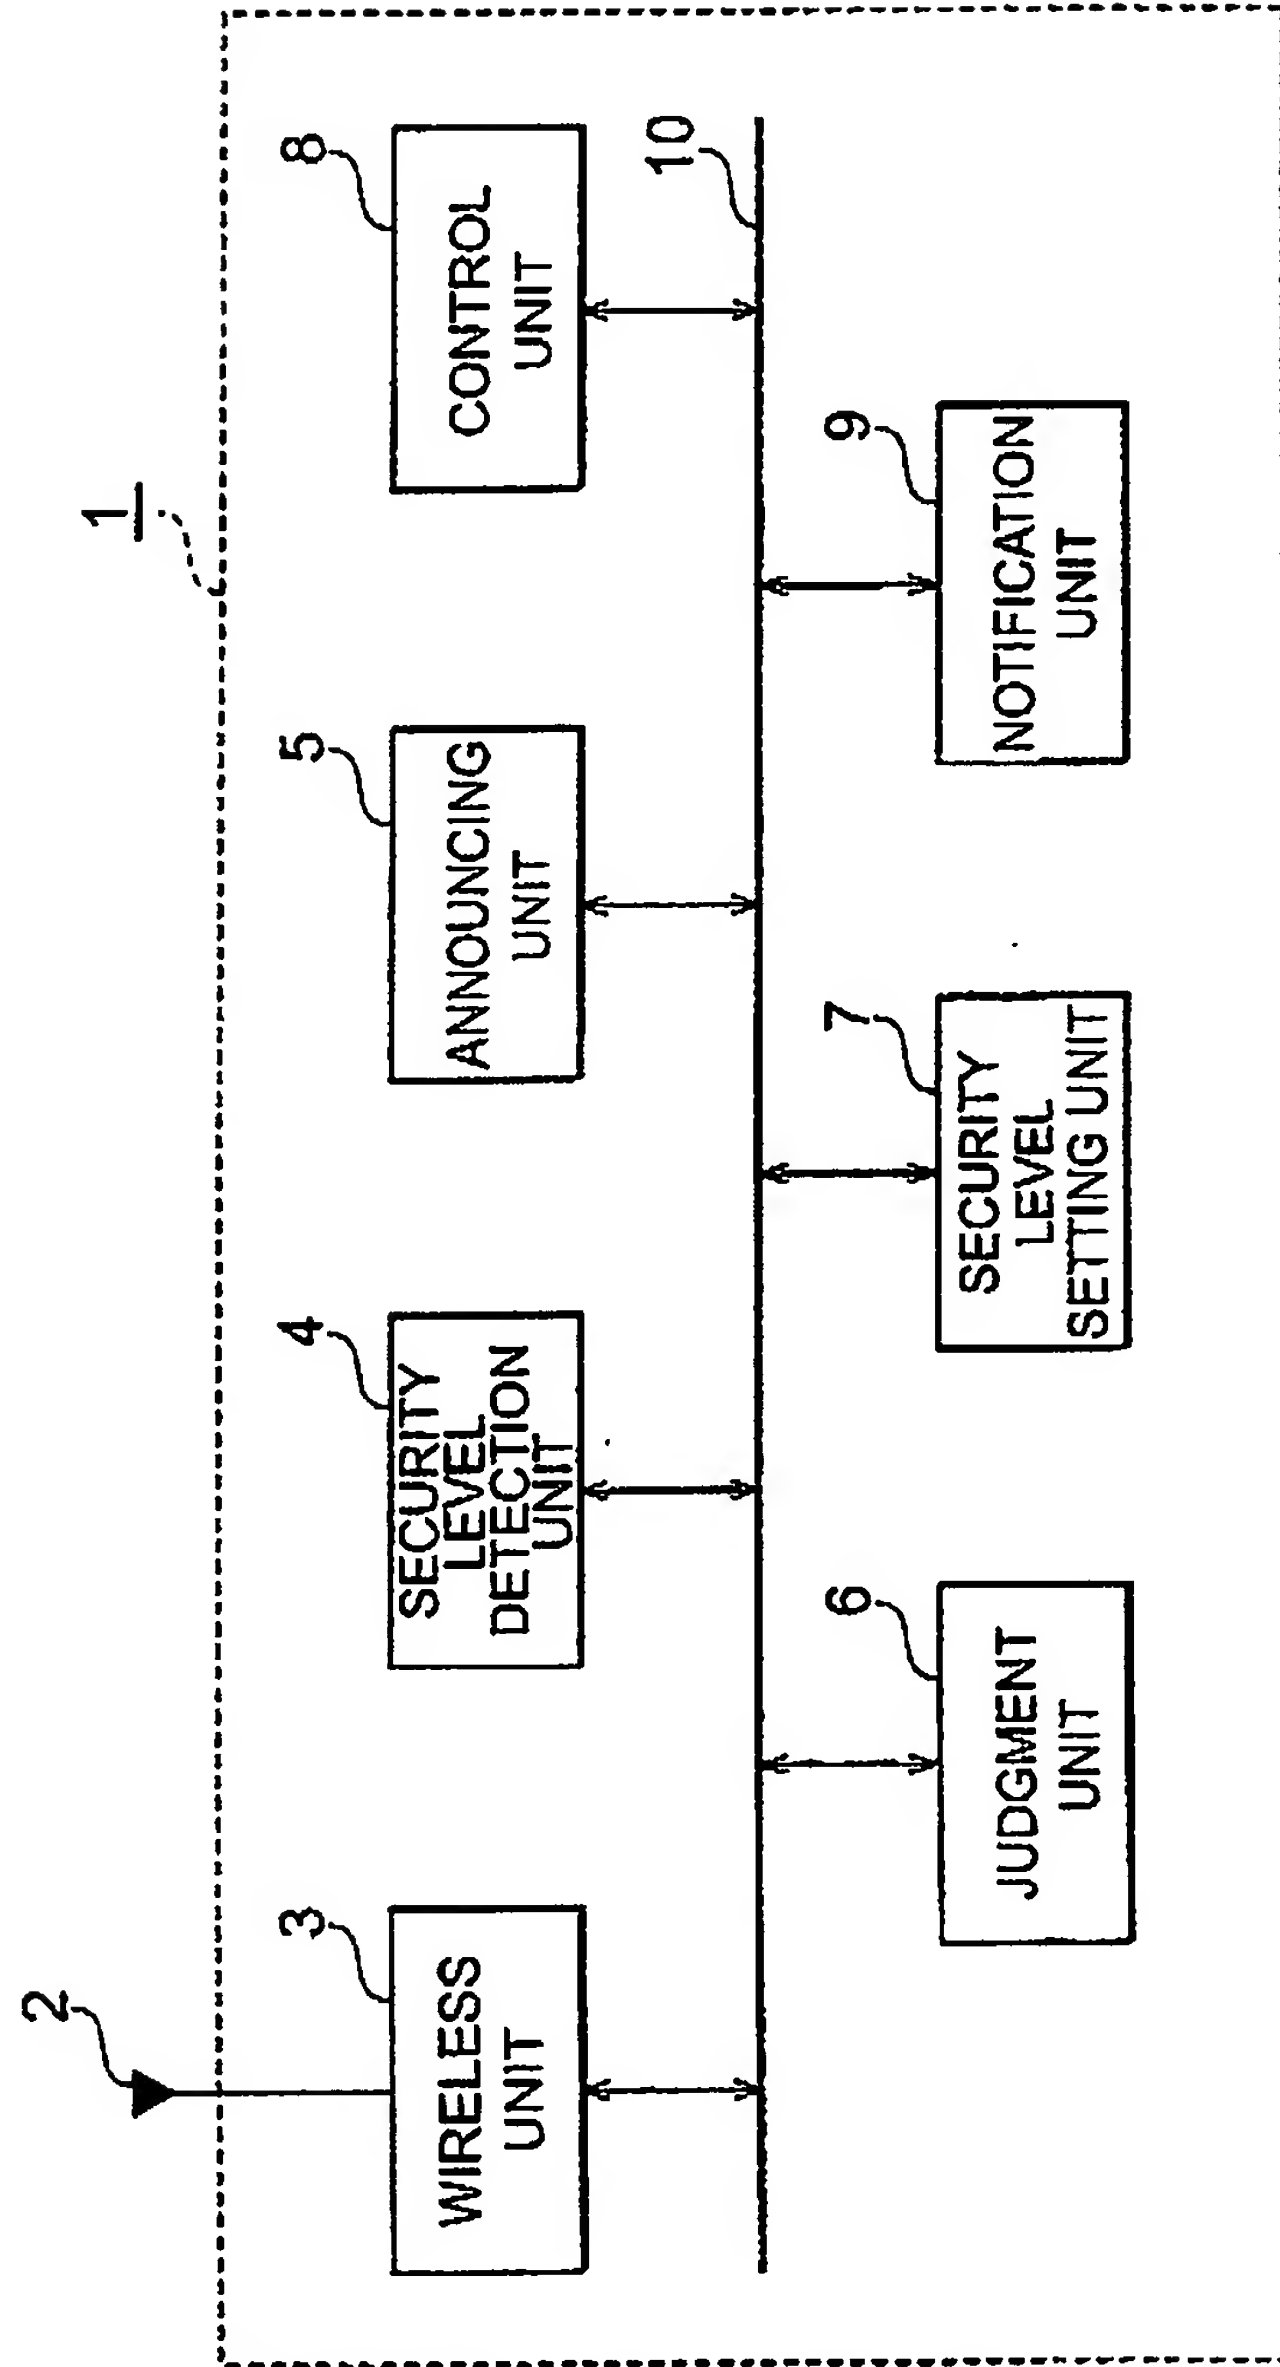


Fig. 2

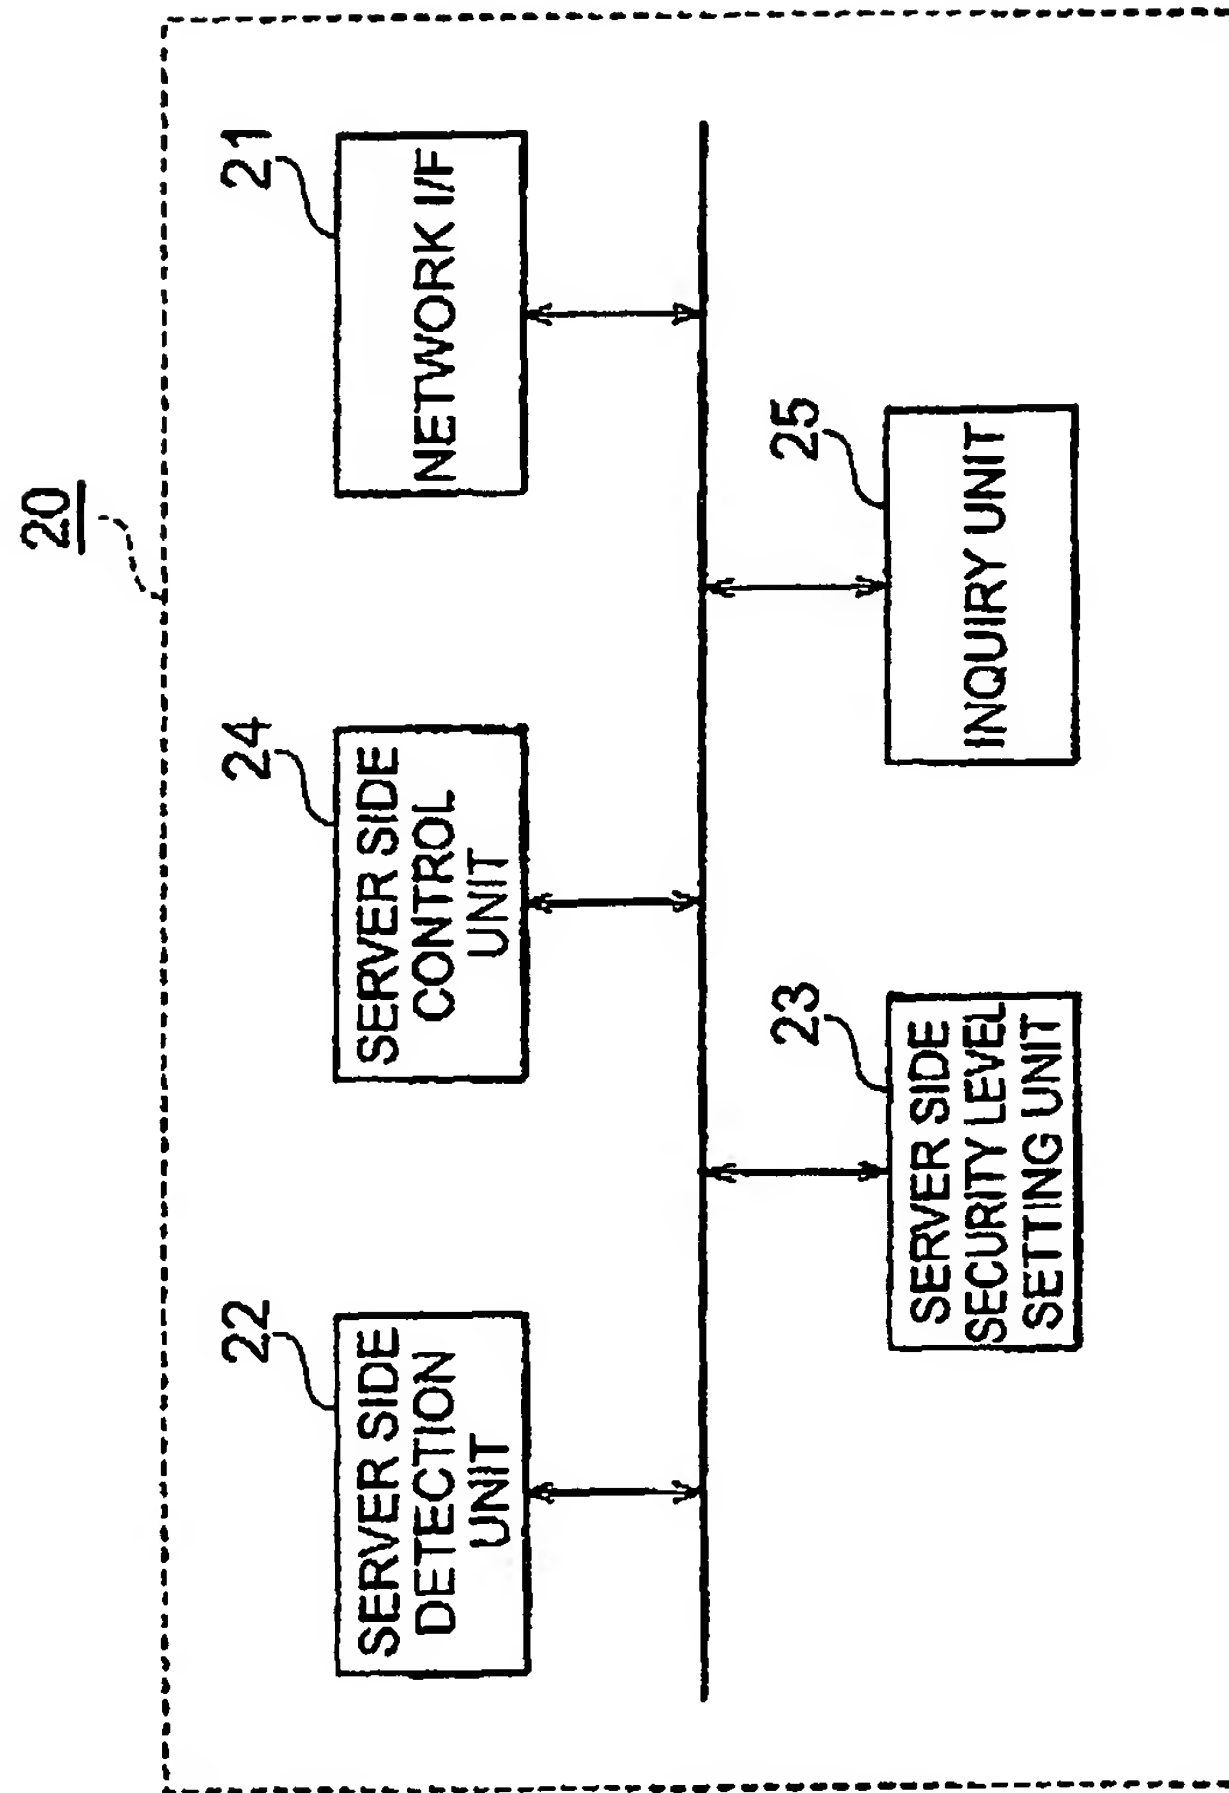


Fig.3

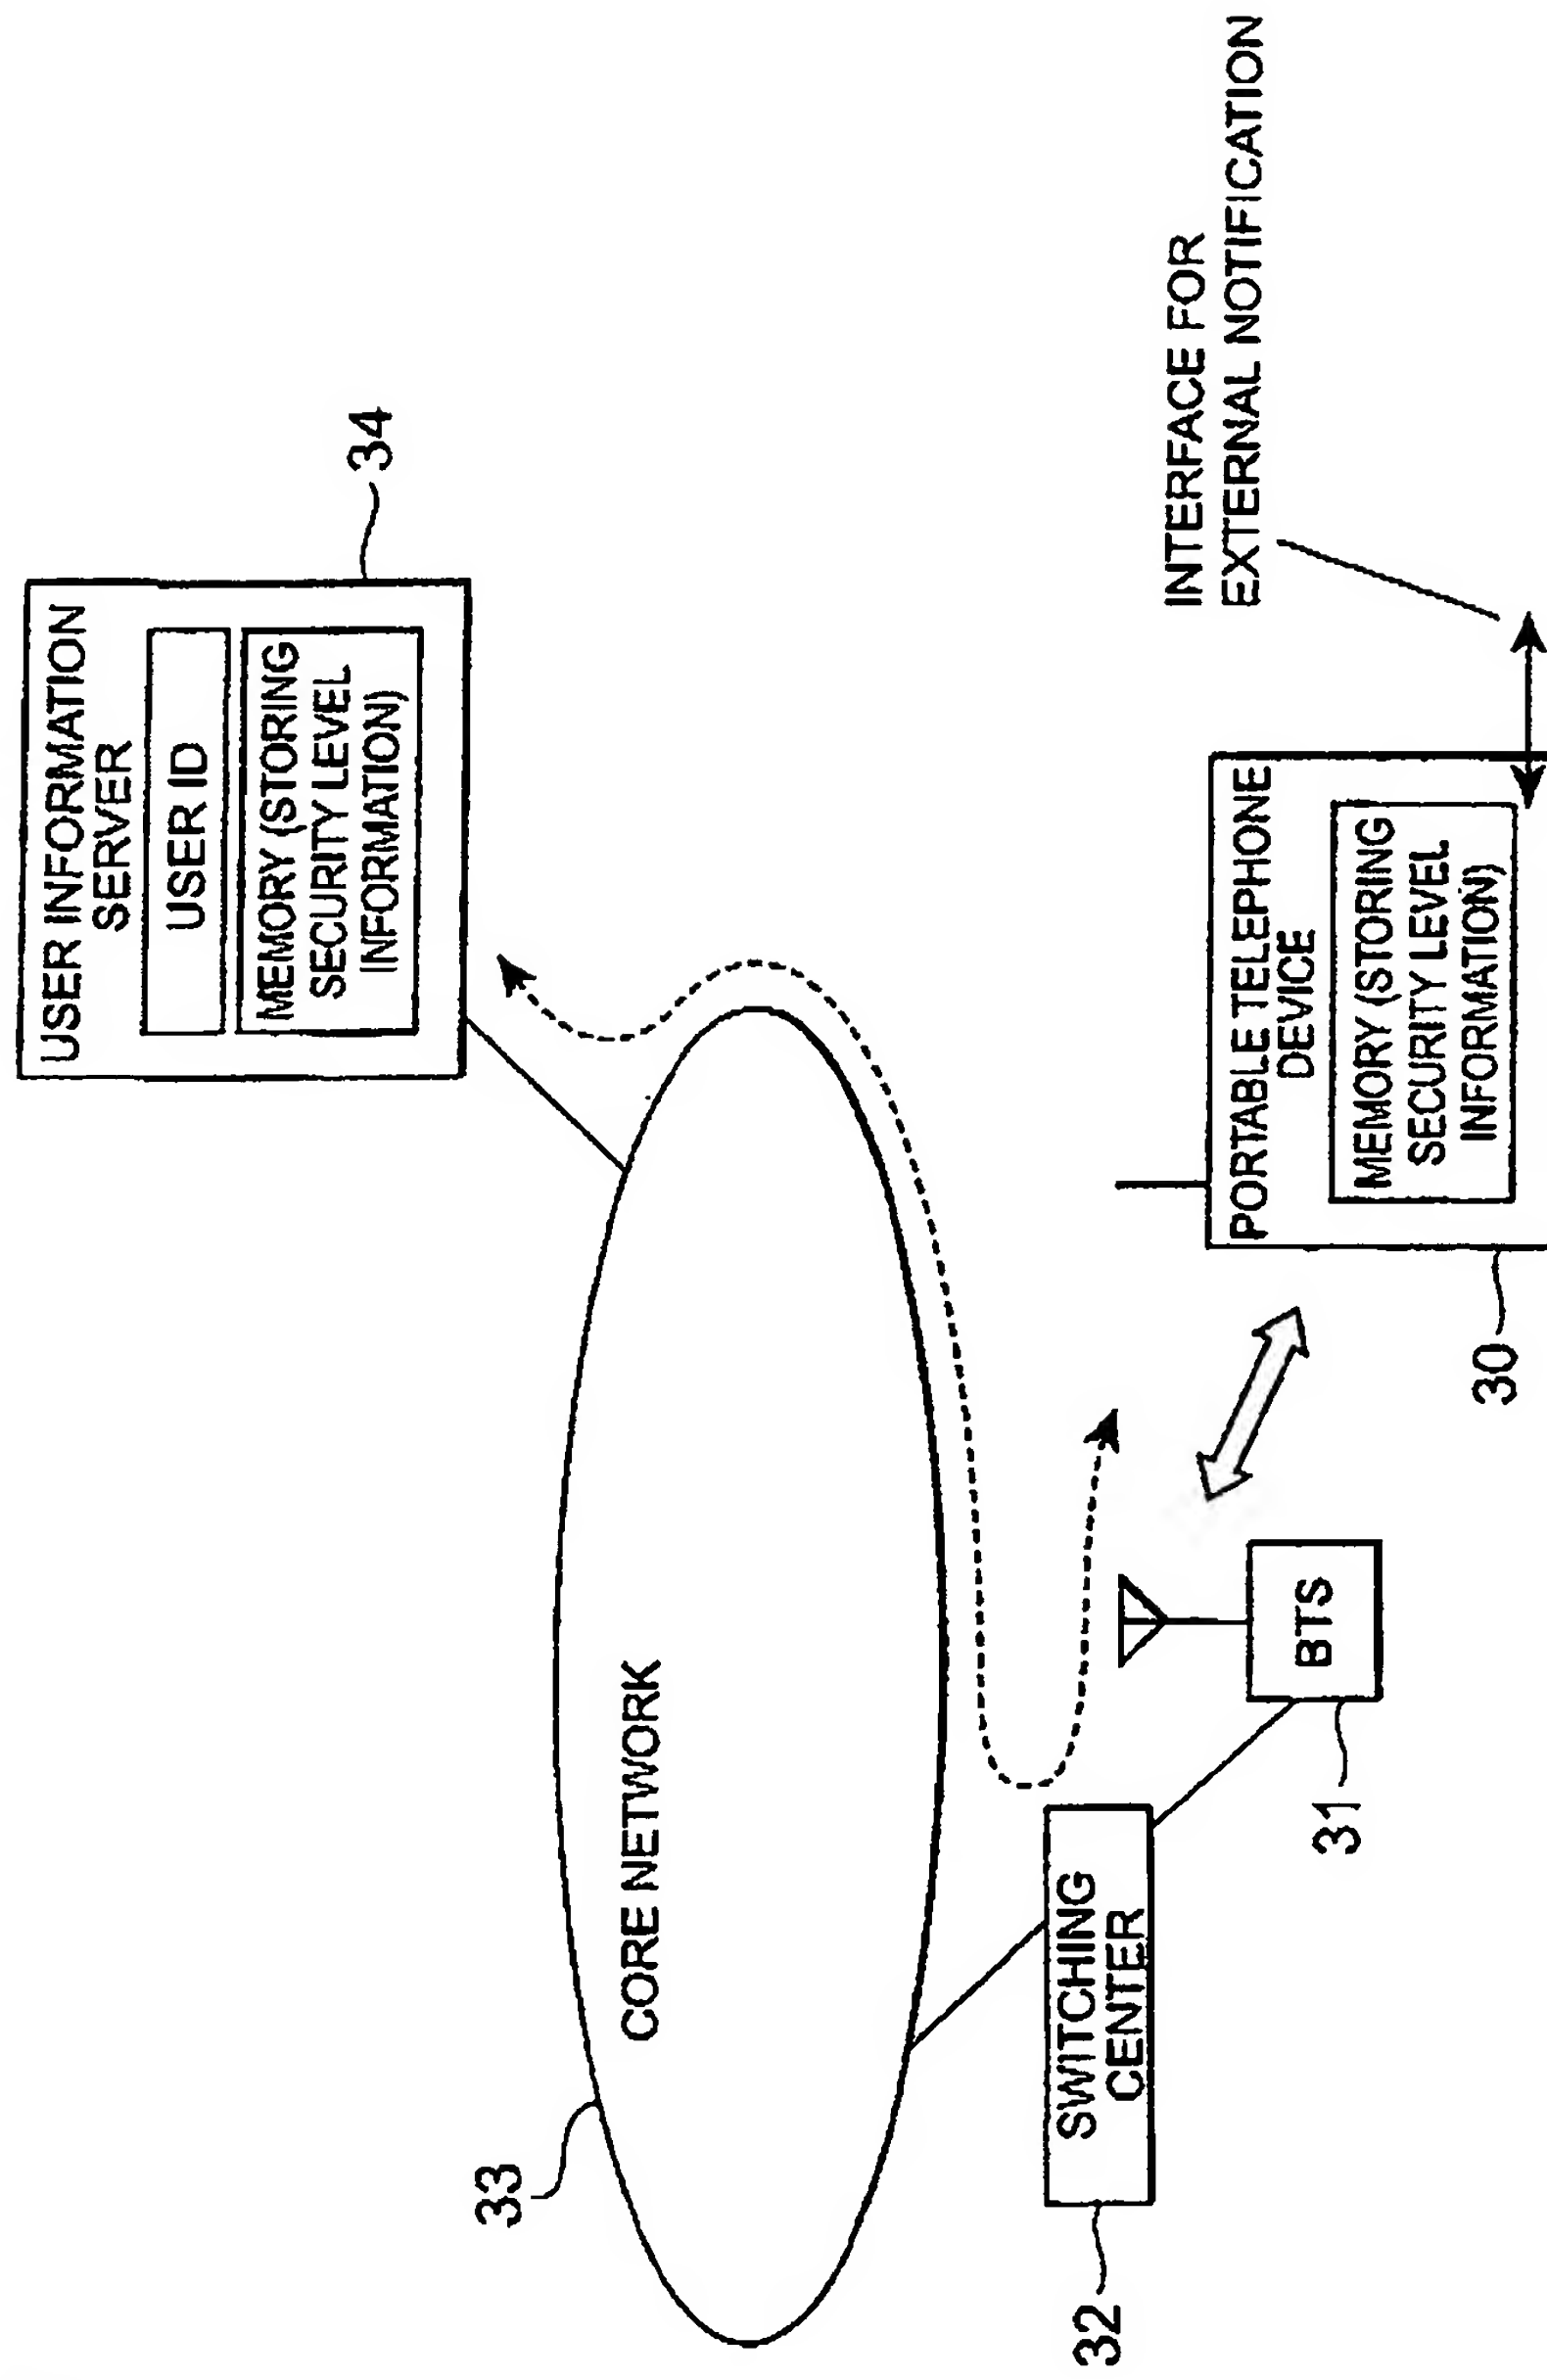


Fig.4

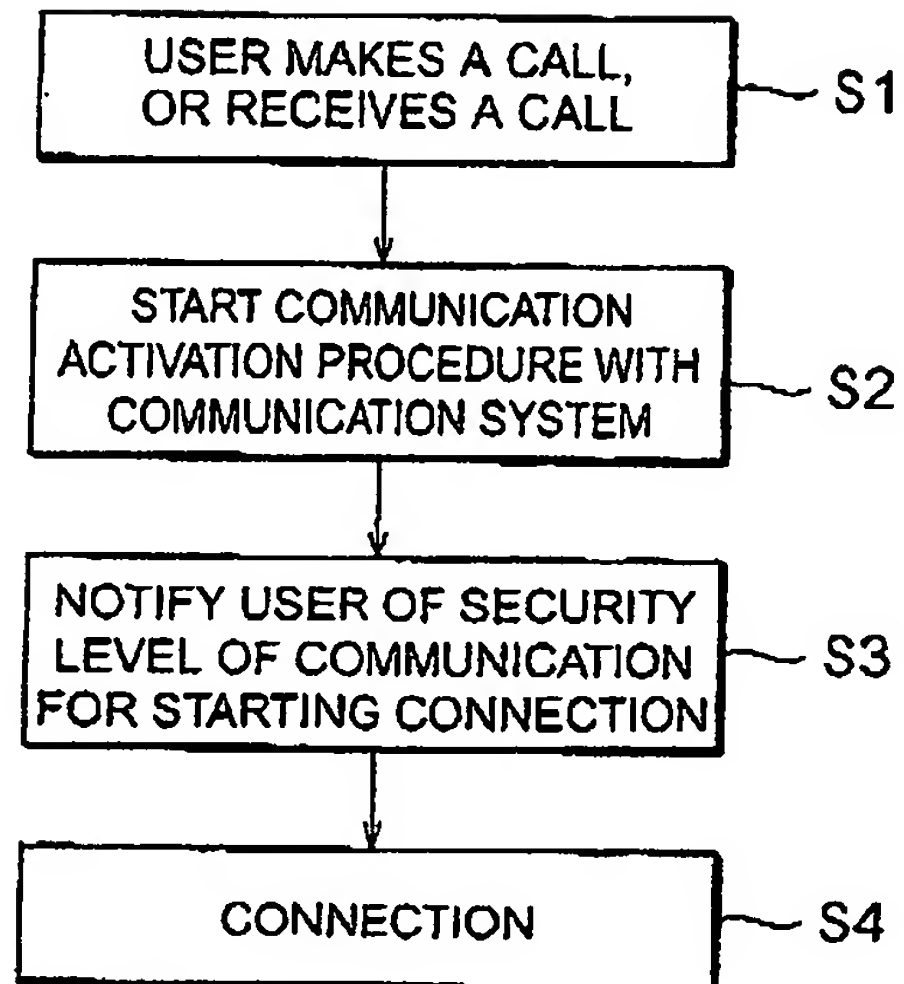


Fig.5

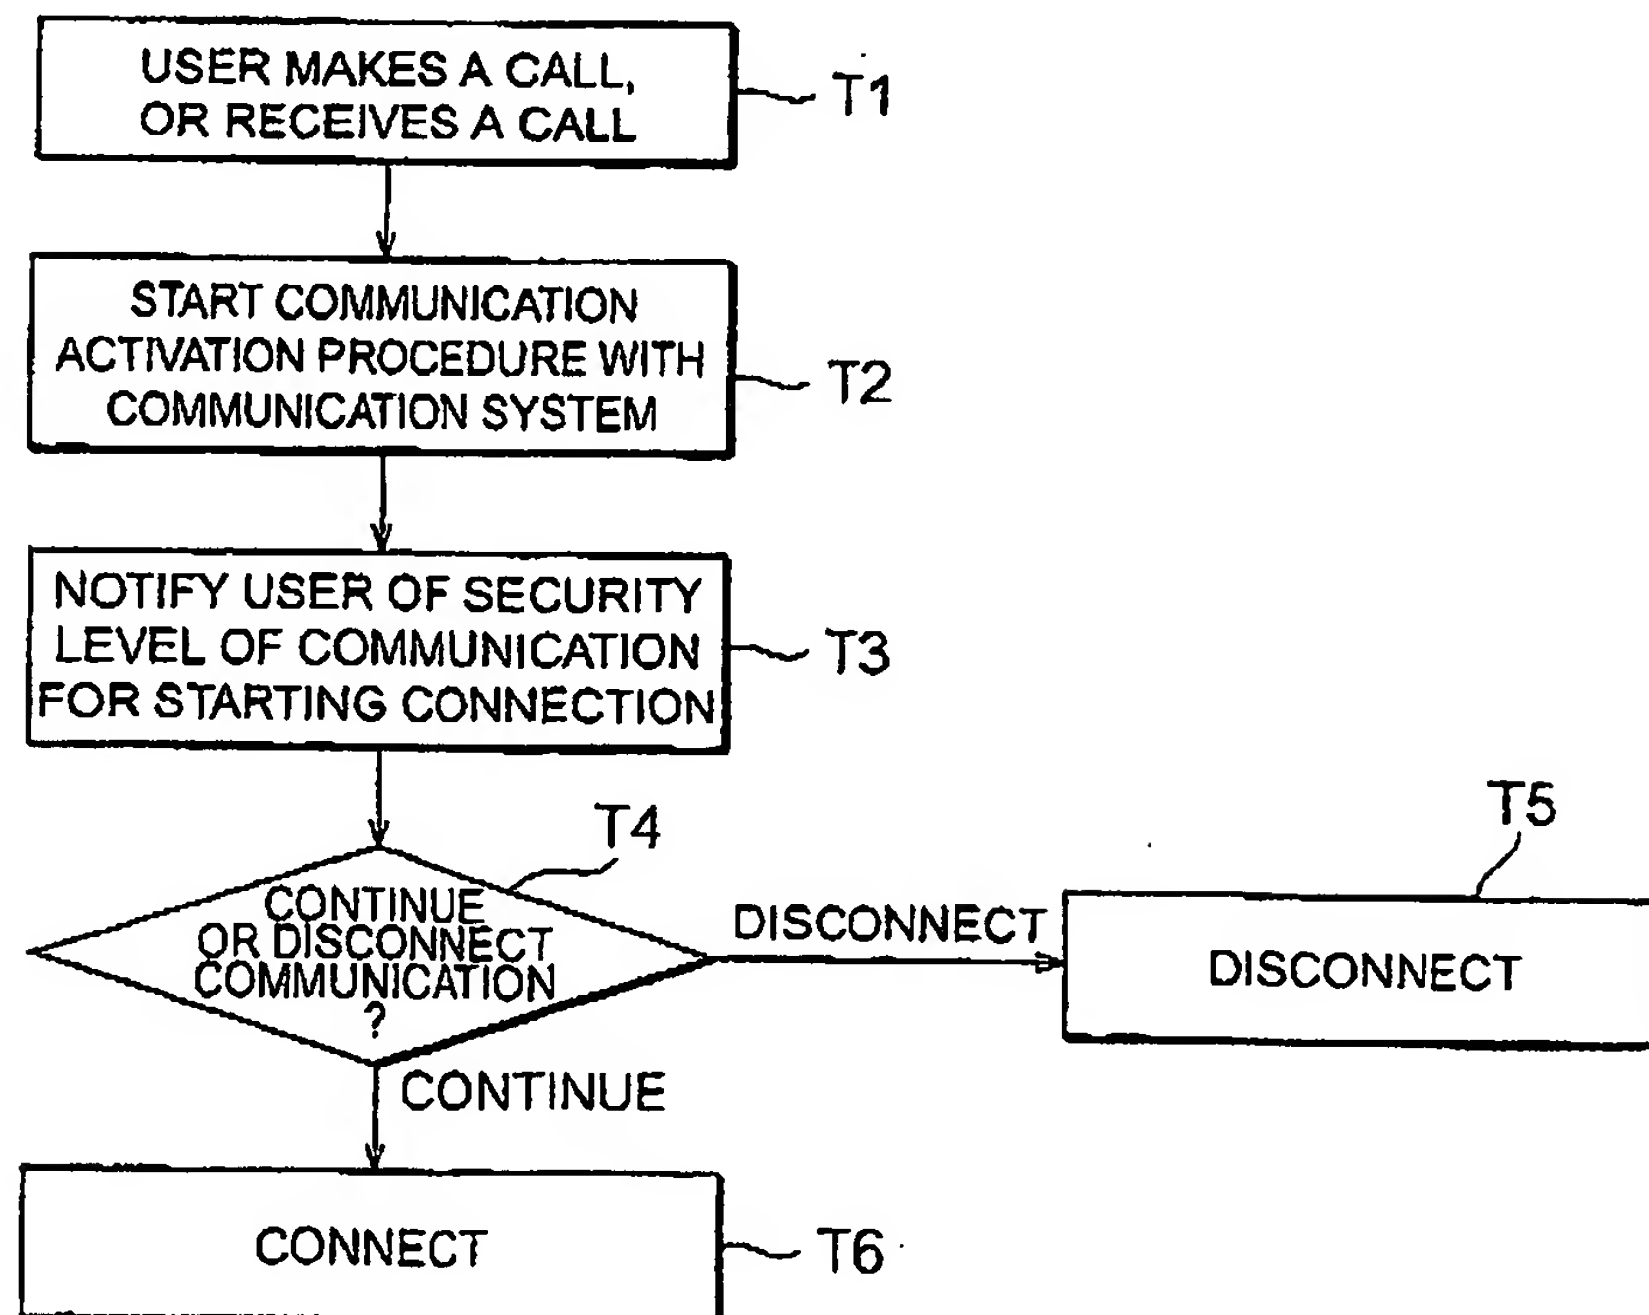





Fig.6**Fig.7**

Fig.8







Fig.10

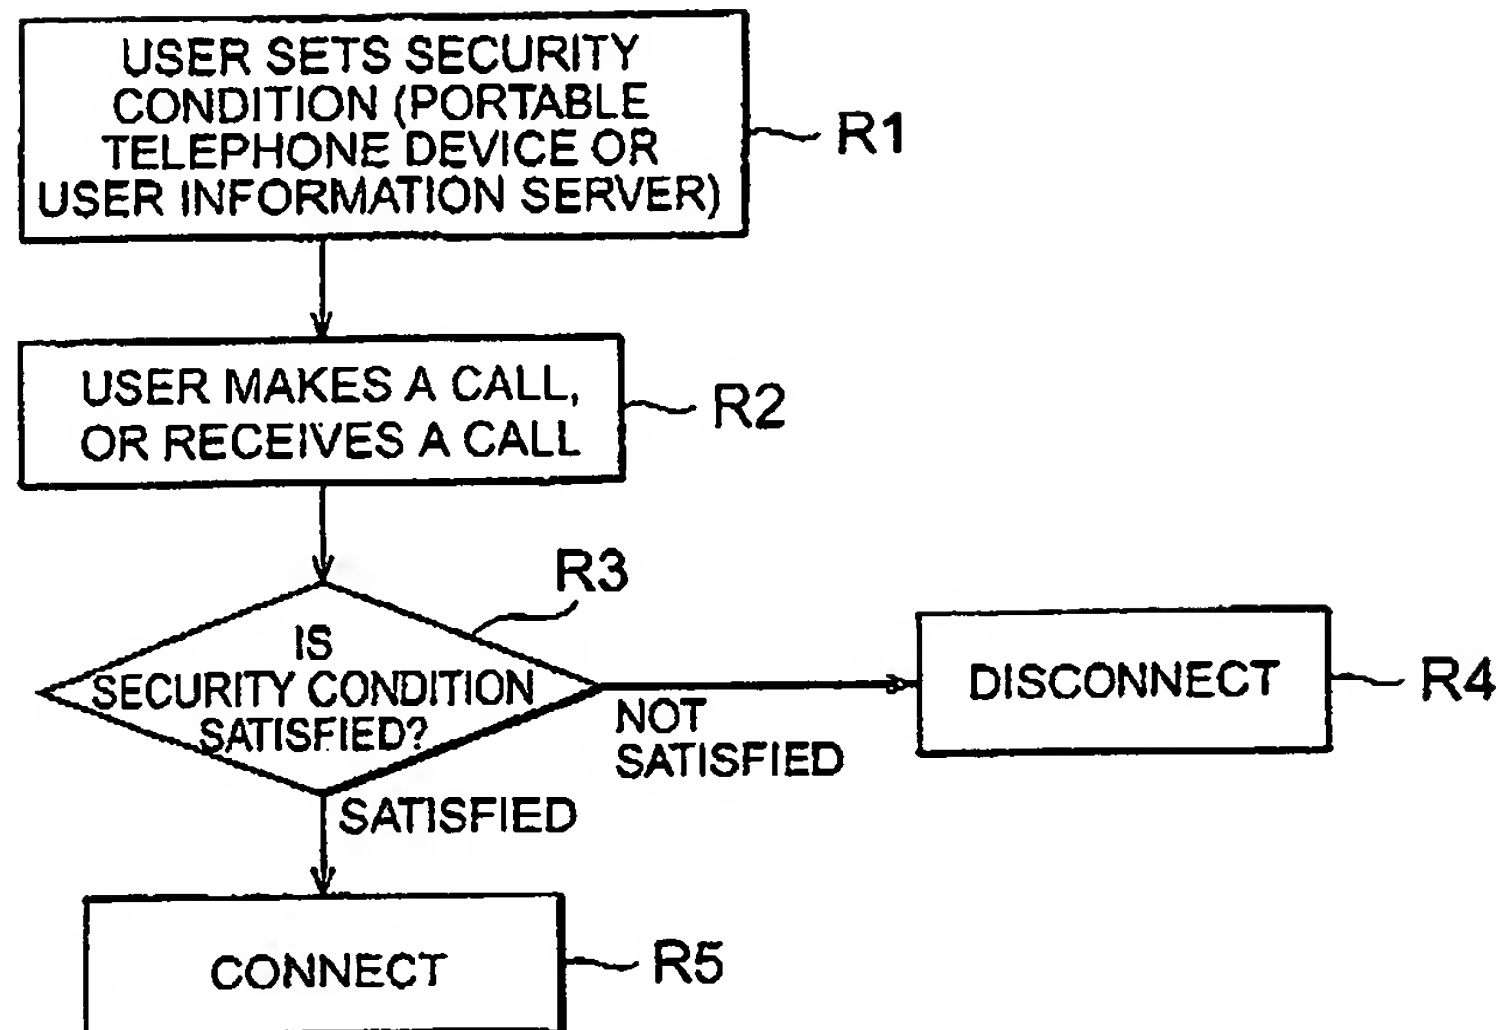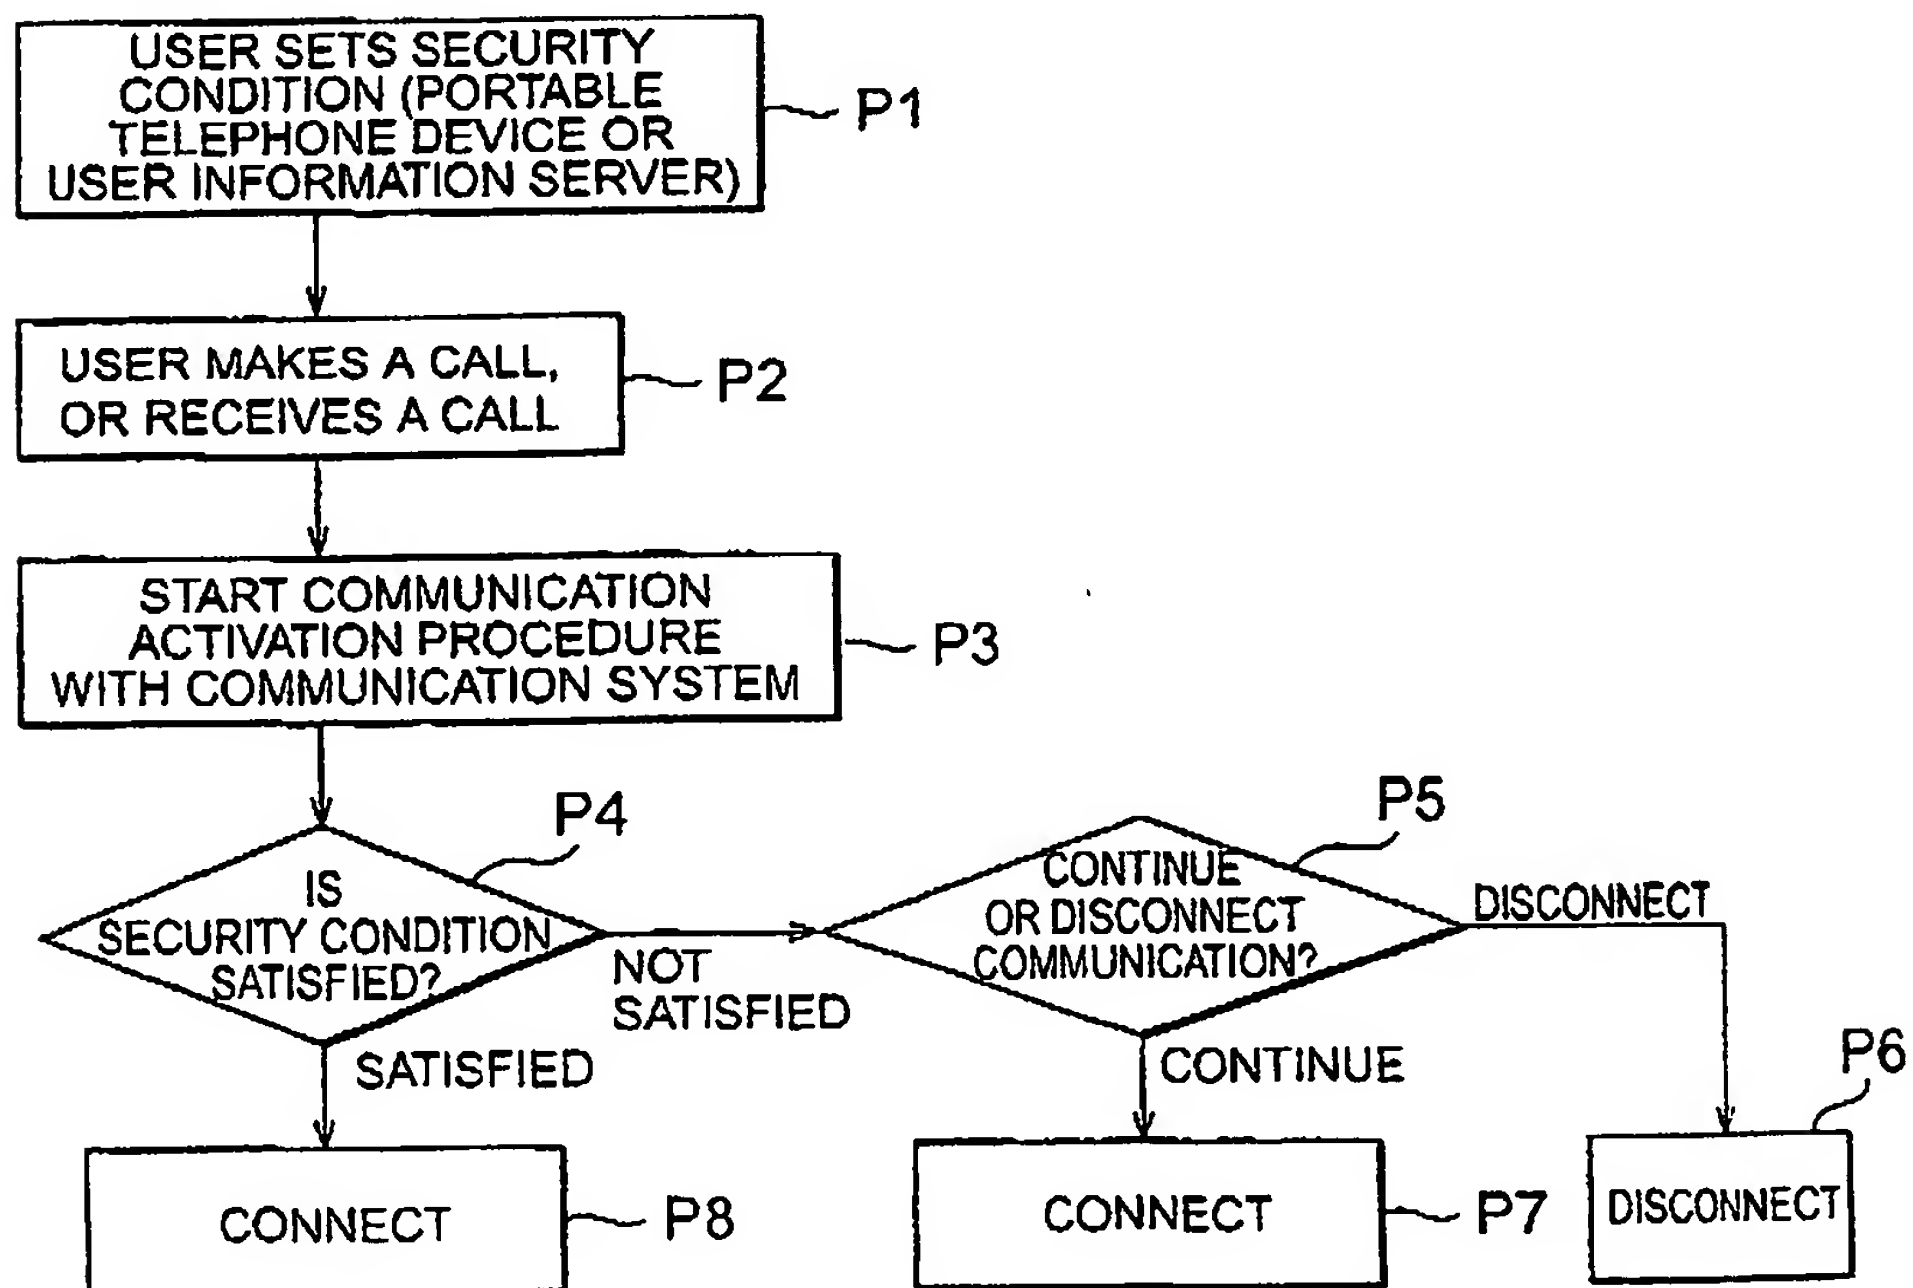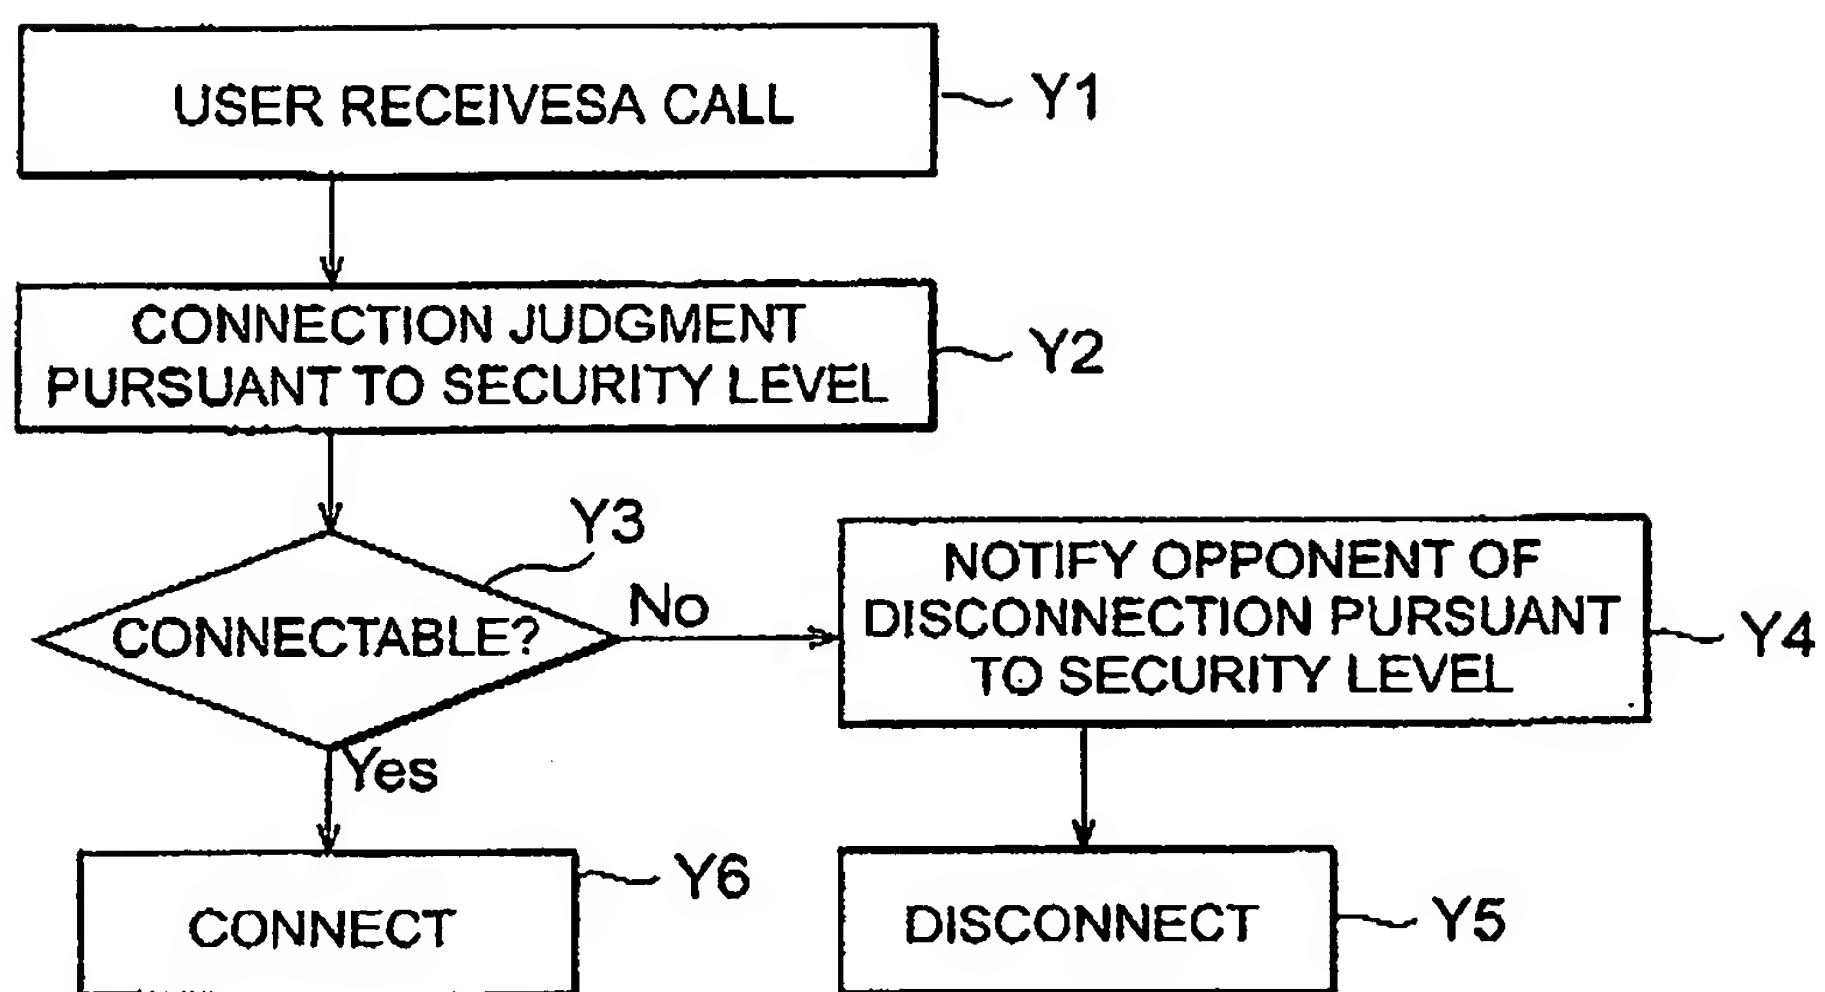



European Patent
Office

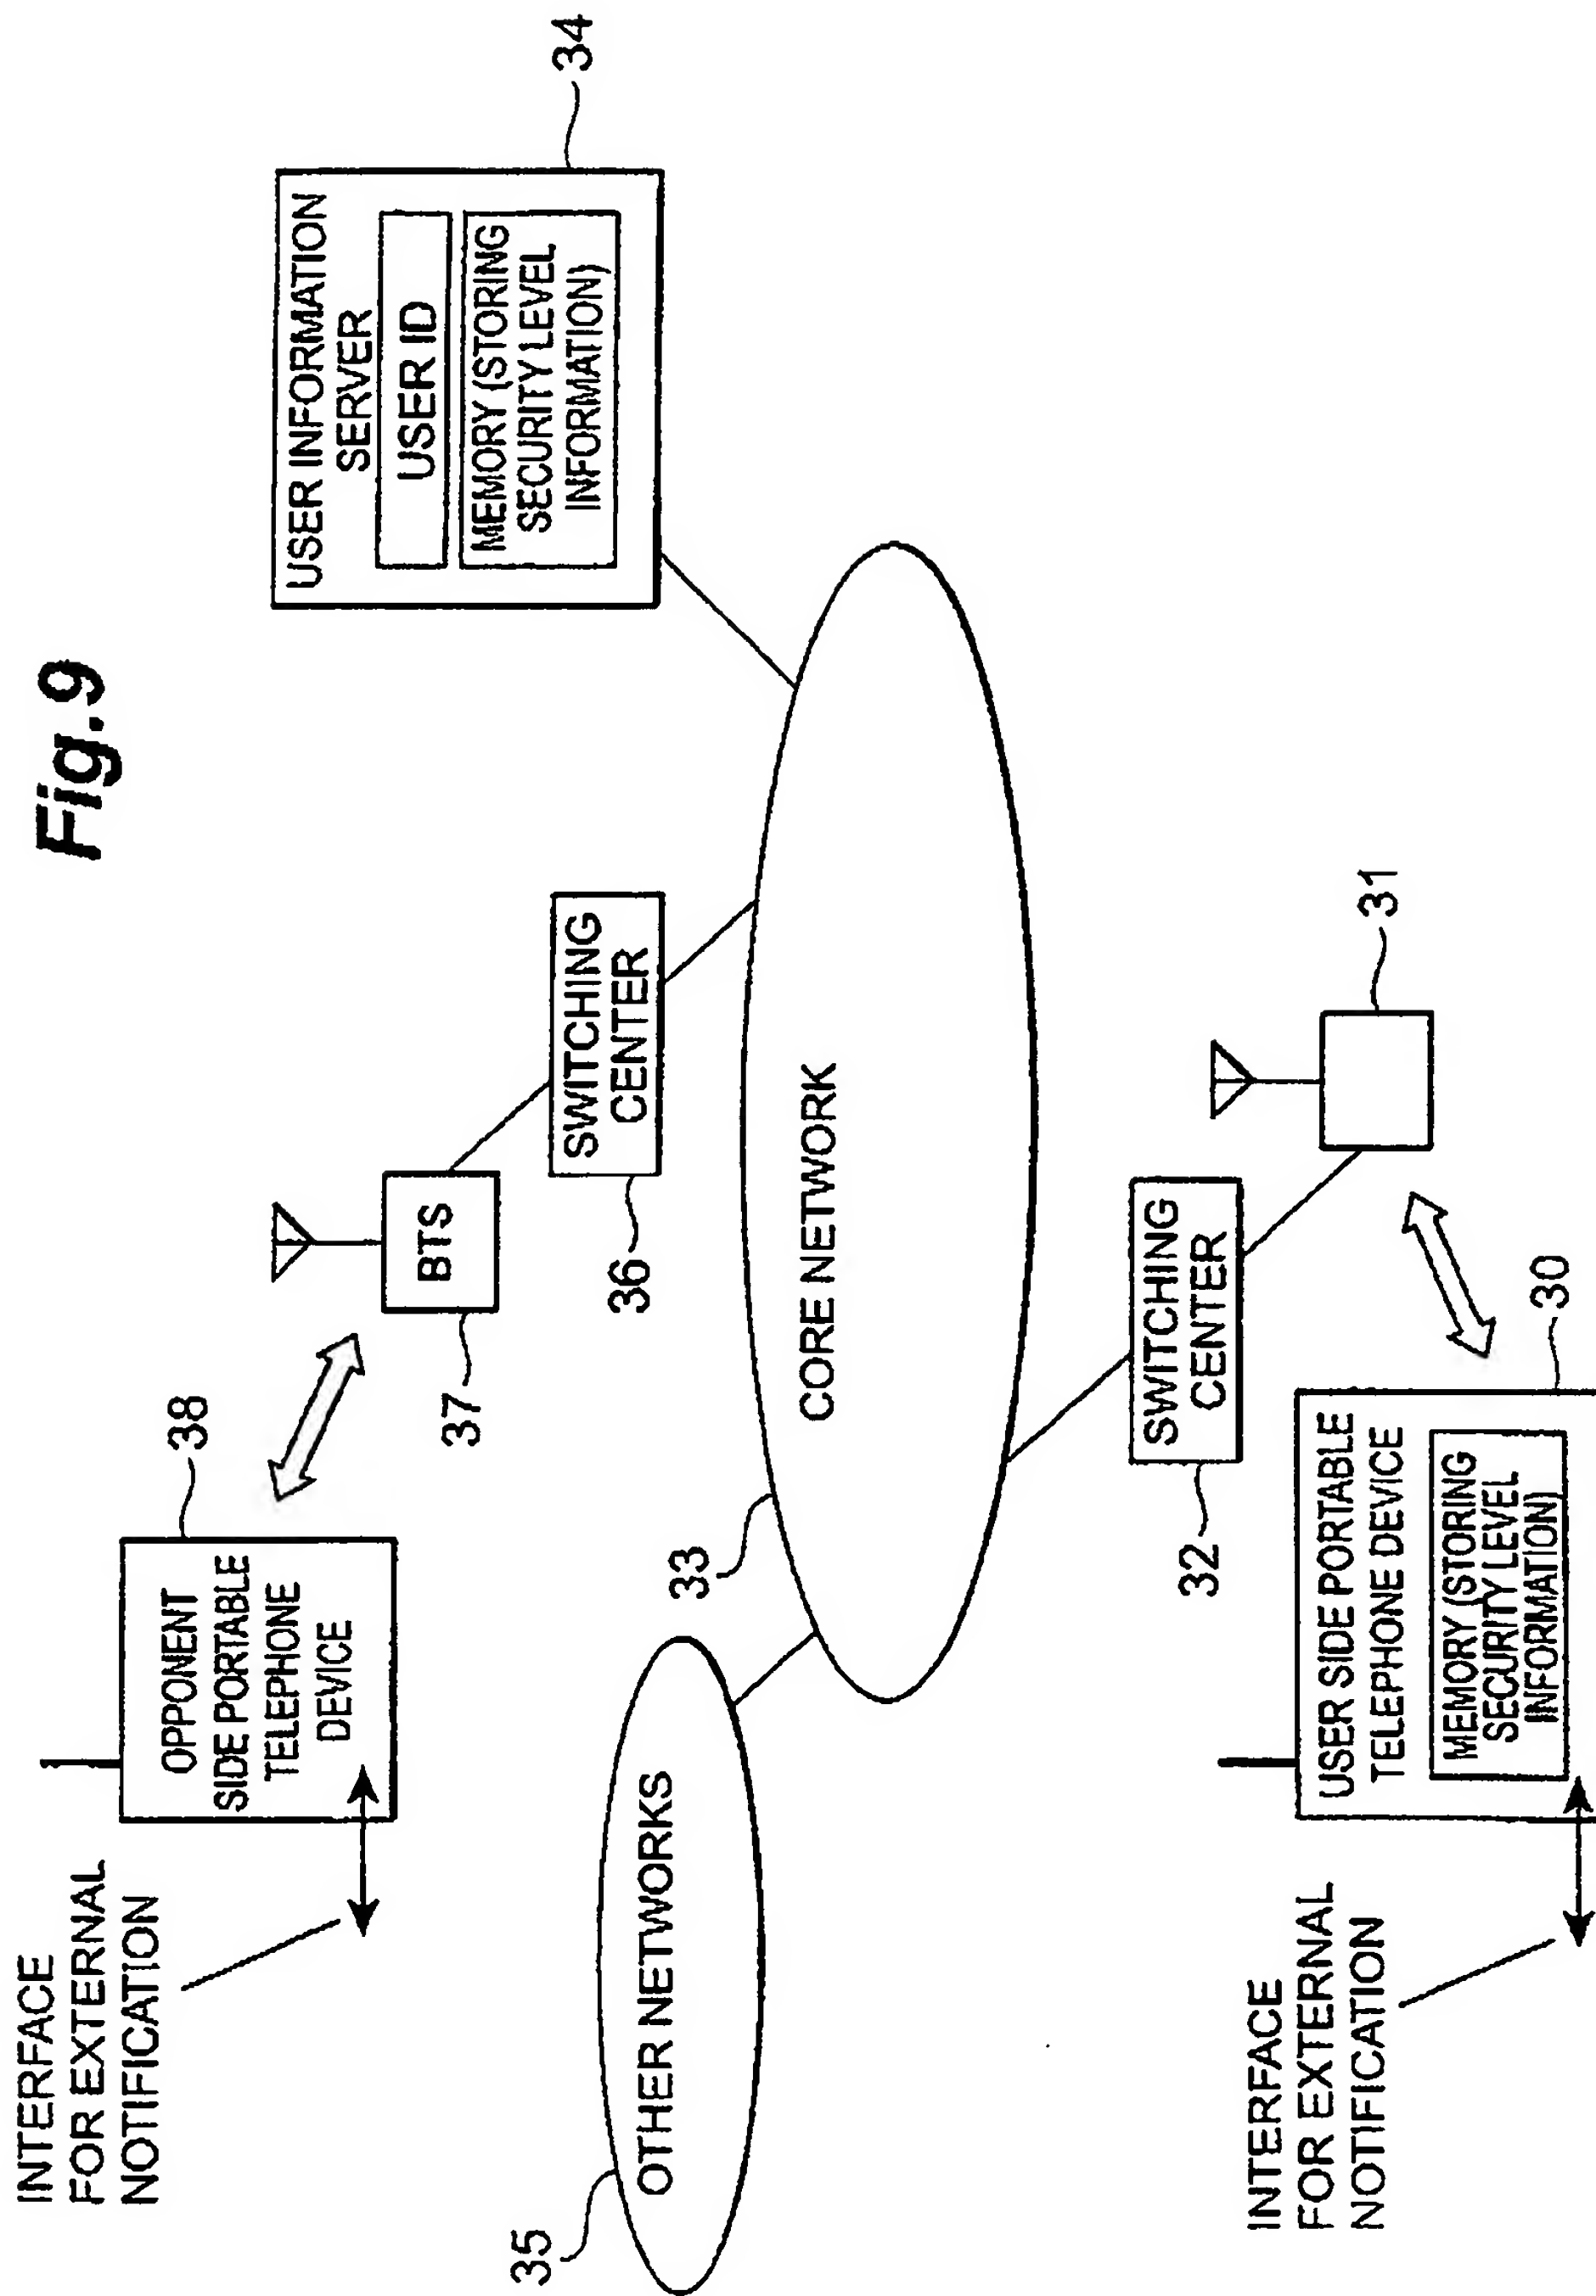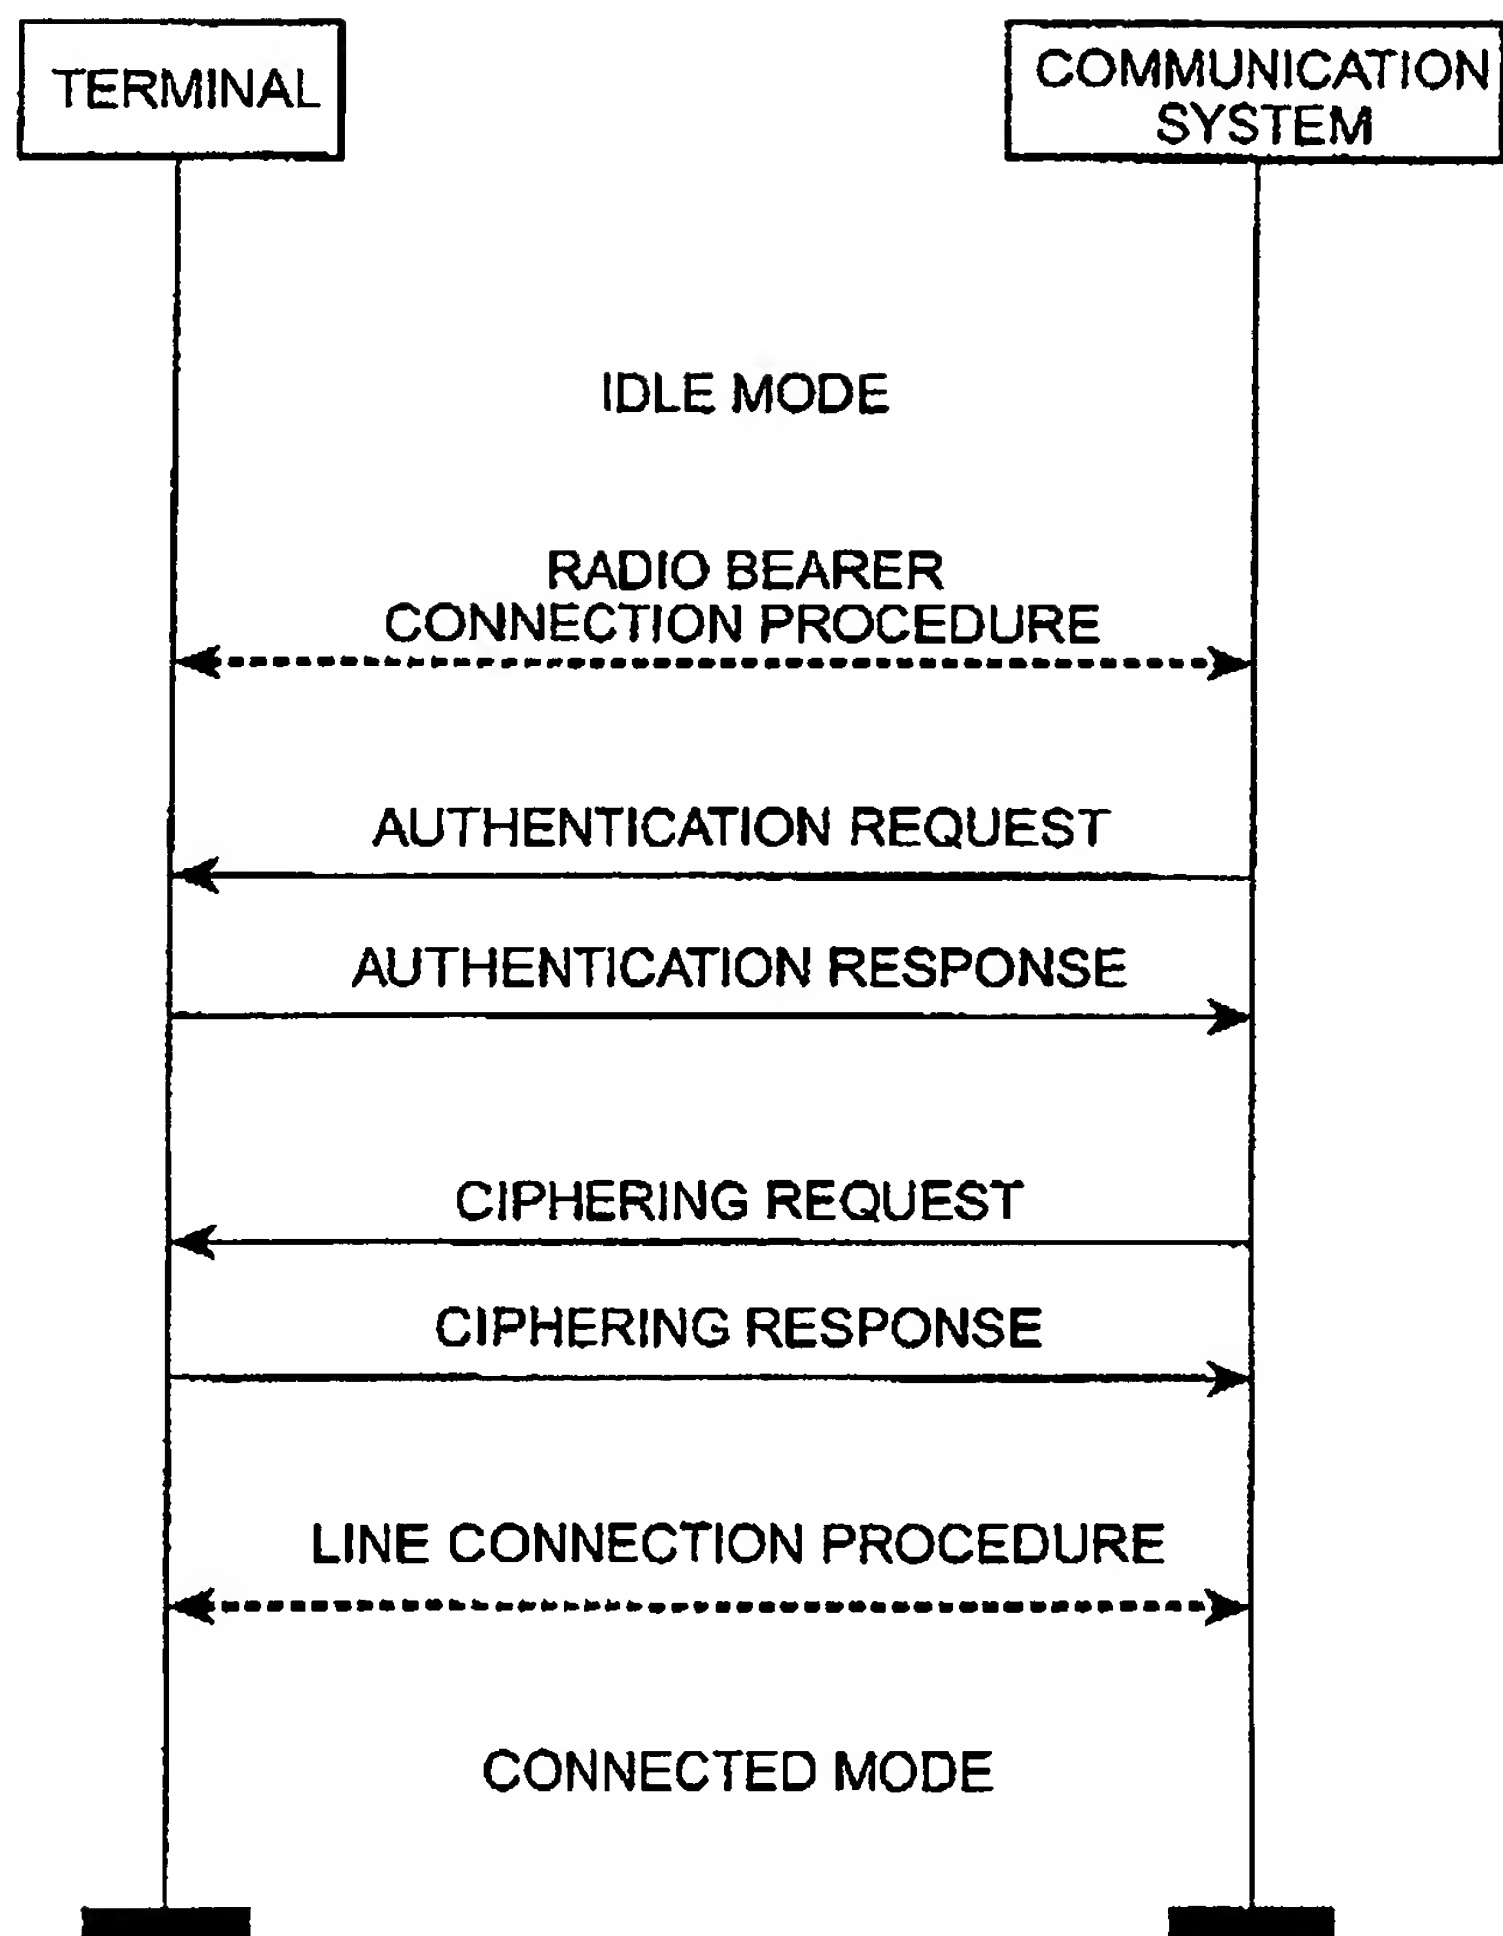EUROPEAN SEARCH REPORT

Application Number
EP 02 00 6107

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 01 08435 A (HUBER ADRIANO ; SWISSCOM AG (CH)) 1 February 2001 (2001-02-01)	1-3,7	H04Q7/38
Y	* page 5, line 12,13 - line 21-27 * * page 6, line 16-18 * * page 8, line 9 * * page 10; claims 1,2 *	4-6,8,9	
X	EP 0 779 760 A (NOKIA MOBILE PHONES LTD) 18 June 1997 (1997-06-18)	1,2	
Y	* column 1, line 4-6 * * column 2, line 51-53 * * column 4, line 8-13 * * column 8, line 57 - column 9, line 4 * * column 9, line 14-23 - line 27-31 * * column 10; claims 1,5 * * column 11; claim 11 *	5,9	
Y	DE 198 12 215 A (SIEMENS AG) 23 September 1999 (1999-09-23) * column 1, line 61-64 * * column 2, line 20-23 * * column 3, line 42-46 * * column 5, line 29-44 * * column 6; claims 1,2 * * column 7; claims 6-10 *	4,6,8	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04Q H04L
A	WO 00 74345 A (ERICSSON TELEFON AB L M) 7 December 2000 (2000-12-07) * the whole document *	1-9	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 19 June 2002	Examiner Isopescu, C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date O : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (Pd/C31)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 00 6107

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-06-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0108435	A	01-02-2001	WO 0108435 A1	01-02-2001
			AU 4598899 A	13-02-2001
			EP 1197117 A1	17-04-2002
EP 0779760	A	18-06-1997	FI 956036 A	16-06-1997
			EP 0779760 A1	18-06-1997
			US 6249584 B1	19-06-2001
			US 2001014942 A1	16-08-2001
DE 19812215	A	23-09-1999	DE 19812215 A1	23-09-1999
			WO 9948318 A1	23-09-1999
			EP 1064810 A1	03-01-2001
			JP 2002507872 T	12-03-2002
WO 0074345	A	07-12-2000	AU 5263700 A	18-12-2000
			EP 1180294 A1	20-02-2002
			WO 0074345 A1	07-12-2000

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.